

Glass Lift with hand winch - K -



250 kg up to 6 m lifting height For roof and front glazings

The K-Lift with hand winch is a compact, lightweight assembly device.

It combines three in one :
it is not only ideal for vertical and overhead glazing up to a height of six meters, but it is also a multi-purpose material lift for construction site or workshop

It is very manageable when being transported as well as when in use, so that the elements can be fitted safely and precisely.

The K-Lift can be quickly retrofitted and used for mobile applications.

- Certification CE
- German certifications TÜV - GS - BGV D8
- Design Upter

Lifting device

- Masts of extruded aluminium sections
- Quick folding base, set up in 30 seconds without tools, easy and convenient
- Very strong and compact construction
- Heavy duty casters wheels to moving in job site
- Two lifting screws for use in uneven ground. It can also be set up under slope
- Steel pulleys with ball bearings
- Easy to carry for horizontal or vertical transport

Three safety systems

1. Hand winch with automatic braking system - the load remains in position whenever the handles are released.
2. Automatic Safety Blocking System - safety knobs which permit the user to block and unblock each mast.
3. Internal Pendulum Brake - automatically activated on each mast section if they were to suddenly fall, which can be easily unblocked by a trigger on each profile.

Manual winch

- With auto-braking system
- With Detachable crank handel
- Non-rotating Ø6 mm galvanised steel rope (7x19+0), resistance 2150 Kg (4739.94 lb) - DIN 3060).

Other model on request

- With electric or pneumatic winch
- Capacity up to 350 kg

Equipment



- Crane arm (300 mm lenght) included
- Universal crane arm
- Fork
- Cradle for roof and front glazing
- Hanging crane for front glazing
- Other equipment on request

Glass Lift with hand winch - K -

Specifications		K 350	K 450	K 550
Lifting height (A)	m	3,86	4,93	6,00
Lifting height (B)	m	3,46	4,52	5,58
Load capacity	Kg	300	300	250
Unit weight	Kg	120	135	150
Lenght x width (store)	mm	707 x 600 x 1623		
Minimal load	Kg	20		
Counter weight	Kg	120		



Safety knob (on each mast)

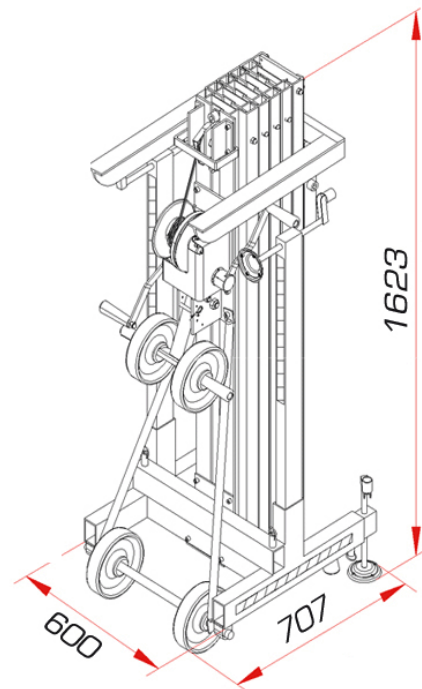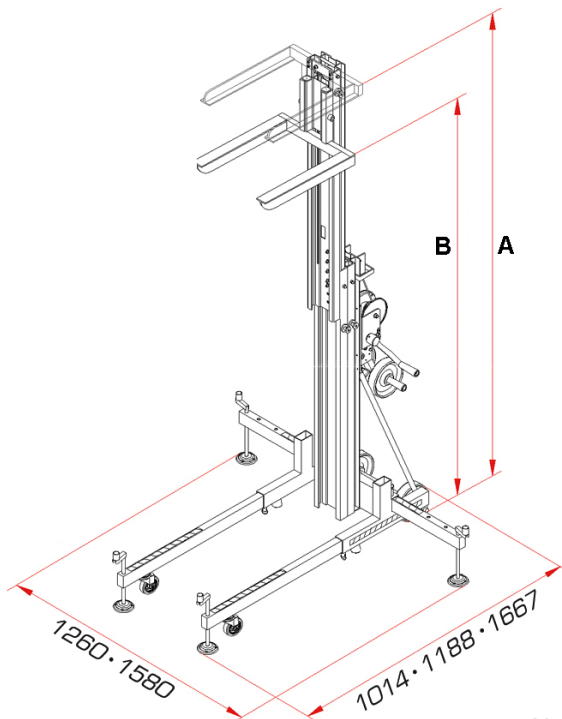


Also possible with fork



GL - 4 V - Cradle for rroof and front glazing

- Capacity 180 kg (othe capacity on request)
- Dimensions 1460 x 454 mm (other on request)
- Weight 27 kg

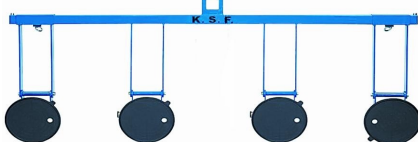

GL - 4 H - Hanging crane for front glazing

- Capacity 240 kg (other capacity on request)
- Dimenssions 1450 x 537 mm (other on request)
- Weight 24 kg